




comm@antideflagranticce.com

**PRESSACAVI A DOPPIA TENUTA PER CAVO ARMATO SERIE “PAP”
DOUBLE SEALS CABLE GLANDS FOR ARMoured CABLE SERIES “PAP”**

MODO DI PROTEZIONE - PROTECTION MODE:
I M2, EEx d I, IP 66 (Amb.temperature -50°C to +110°C)

CERTIFICATO - CERTIFICATE: ATEX, GOST-R

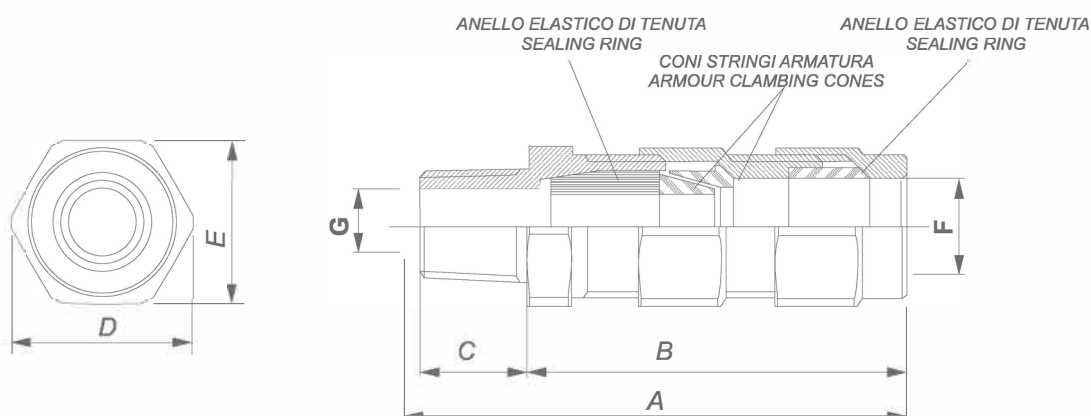

TIPO TYPE	Grandezza Size*	Diametro cavo sotto armatura Cable diameter underarmour	Diametro esterno cavo Overall Cable diameter	Codice gommino Ring code	A mm	B mm	C mm	D mm	E mm	F mm	G mm
PAP 1	M20-1/2"	6-9 6-9 9-12	8-11 11-14 14-17	1-A1B1 1-A1B2 1-A2B3	88	65	20	33	30	18	13,5
PAP 2	M25-3/4"	6-9 9-12 11-14 14-17	14-17 14-17 17-20 20-23	2-A1B1 2-A2B1 2-A3B2 2-A4B3	88	65	20	40	36	24	18
PAP 3	M32-1"	14-17 17-20 20-23	20-23 23-26 26-29	3-A1B1 3-A2B2 3-A3B3	96	68	25	49	44	30	24
PAP 5	M50-1" 1/2	23-26 26-29 29-32 32-36	29-32 32-36 36-39 39-42	5-A2B2 5-A3B3 5-A4B4 5-A5B5	96	68	25	62	56	43	37
PAP 6	M63-2"	36-39 39-42 42-46	44-48 48-52 52-56	6-A2B2 6-A3B3 6-A4B4	97	69	25	78	70	57	51
PAP 7	M75-2"1/2	44-48 48-52 52-56 56-60	55-59 59-63 63-67 63-67	7-A2B2 7-A3B3 7-A4B4 7-A5B4	104	69	32	97	87	69	62
PAP 8	M80-3"	56-60 59-63 63-67 67-71	63-67 65-69 69-73 73-77	8-A4B4 8-A5B5 8-A6B6 8-A7B7	104	69	32	108	97	79	73

*Filettature/Threads: GAS UNI6125, NPT, ISO metric.

comm@antideflagranticce.com